


COB LED Strip Specification

CZ-24-08-528-13-NW



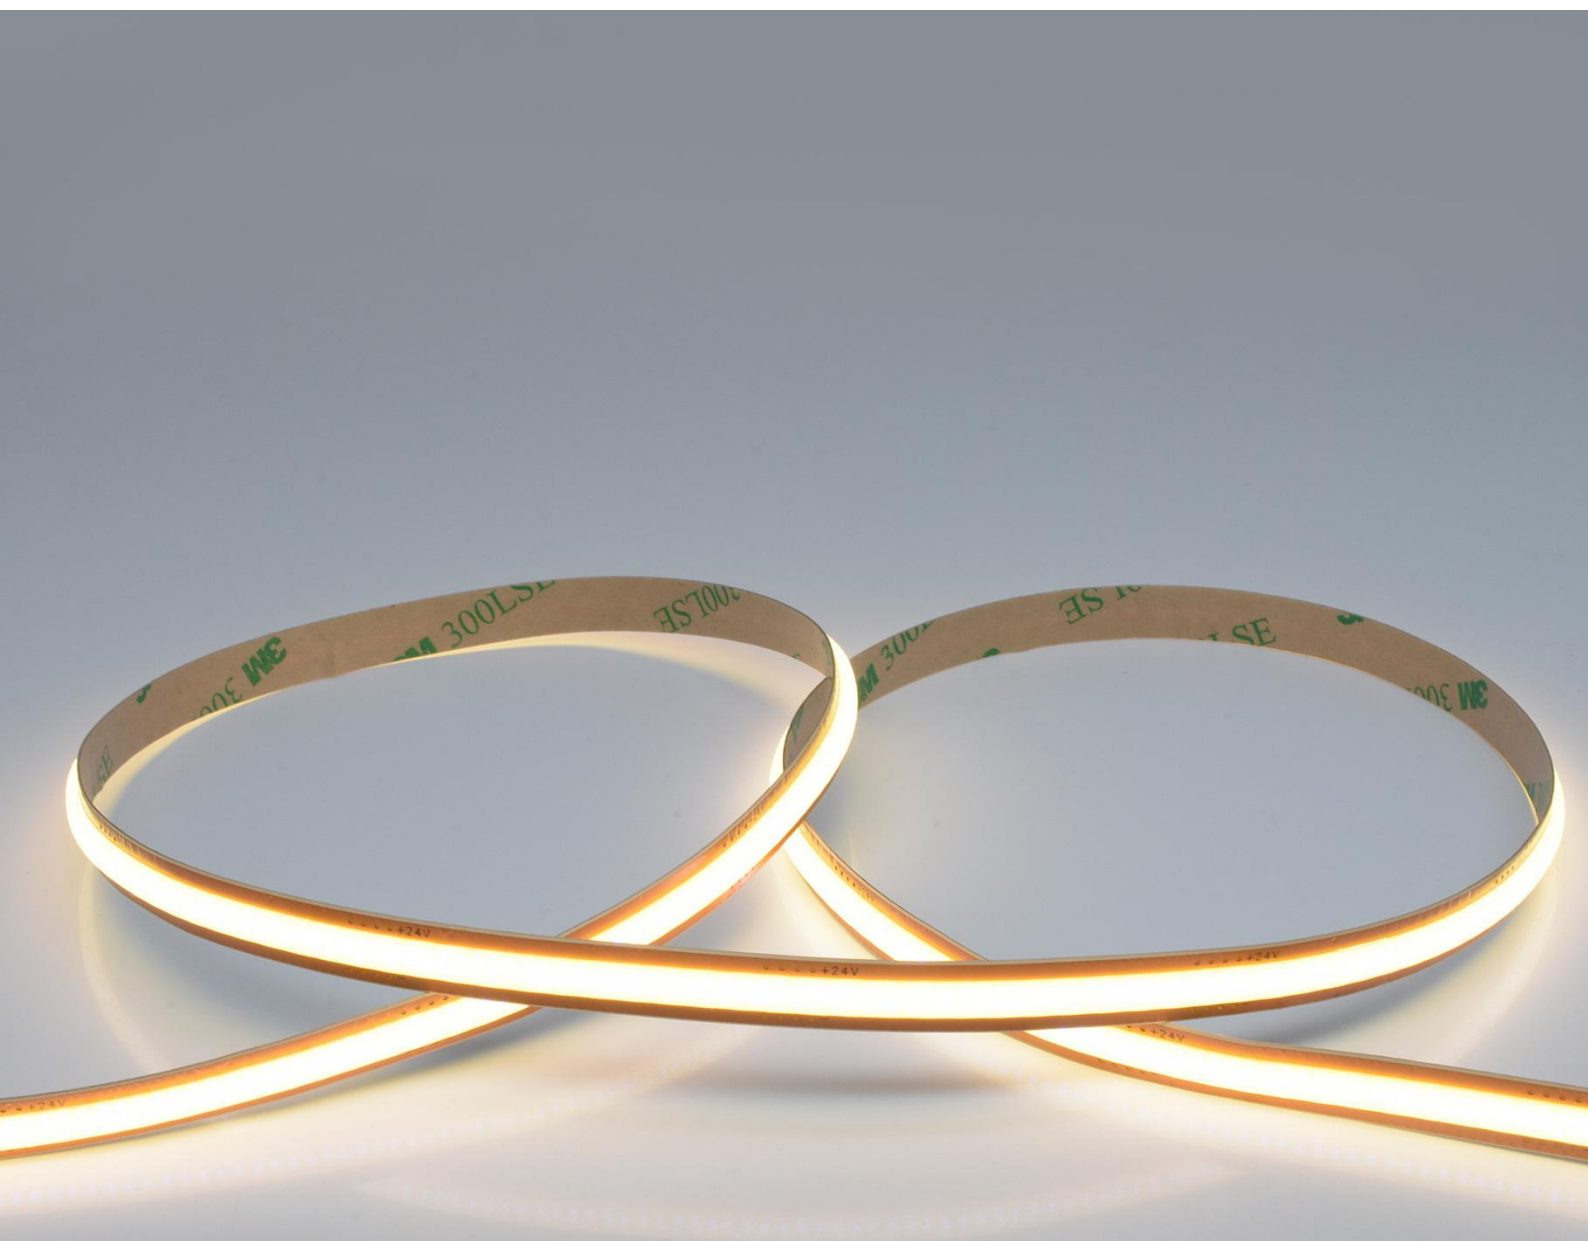

CZ-24-08-528-13-NW



Description


This product is a high-density DC24V COB flexible light strip with 528 emitting chips per meter. COB LED strip light with cuttable design. Adopting advanced COB chip-on-board technology, providing seamless uniform linear light without dot shadow. Support arbitrary cutting along marked cutting lines. Each cut segment can work independently after power connection. Flexible circuit board allows bending for corner & curved installation. Ideal application: ceiling lighting, cabinet light, showcase, wardrobe, background wall, retail decoration, caravan interior lighting and customized lighting projects.



RoHS



Dimensions & Waterproof

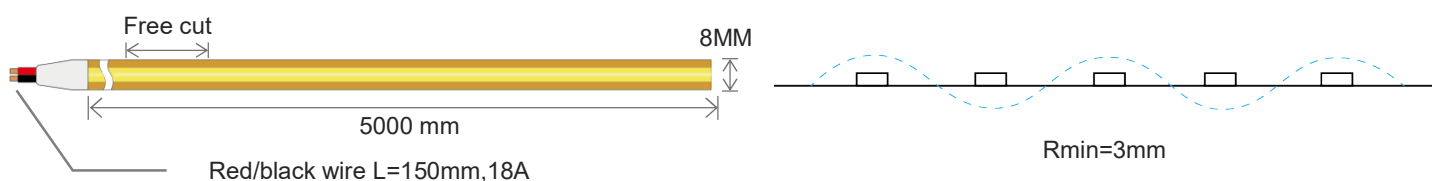

Product Specification

Dimension	5000*8*2.0 MM
Chip Type	Sanan
Chips/m	528
lumens	910-1040 Lm
Step Length	Free cut
Color Rendering Index	≥90

Voltage(V)	DC 24V
Power(W/m)	13 W/M
PCB Width	8 MM
Beam Angle	160°
Operation Temperature	-20°C~+ 45°C
Color Temperature	2700K/3000K/4000K/6000K


Product Photometrics (Data base on IP20 CRI≥90)

Part Number	CCT (K)	Power(13w/m)	
		Lumen (lm/m)	Efficacy (lm/w)
▶528D-COBW27-24V-8MM	2700K ±150K	715-780	55-60
▶528D-COBW30-24V-8MM	3000K ±150K	780-910	60-70
▶528D-COBW40-24V-8MM	4000K ±200K	910-1040	70-80
▶528D-COBW60-24V-8MM	6000K ±250K	780-910	60-70



Light Distribution Curve[Data base on 1m 13W IP20 4000K CRI>90, Unit:cd]


Spectrum Test Report

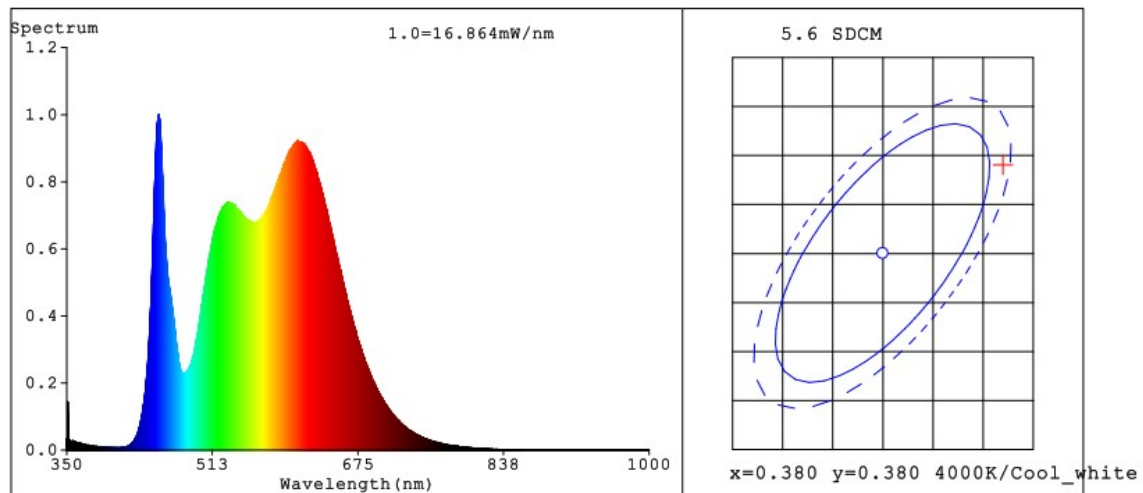


Color Parameters:

Chromaticity Coordinate: $x=0.3920$ $y=0.3890$ $u'=0.2278$ $v'=0.5086$
 CCT=3794K(Duv=0.0024) Dominant WL:Ld =578.7nm WL:Lc = --nm Purity=34.4%
 Ratio:R=20.58% G=76.13% B=3.30% Peak WL:Lp=452.9nm FWHM=18.8nm
 Render Index:Ra=92.1 AvgR=87.5


Packing Information(Data base on IP20)




5meters/reel



5meters/reel



100bags/carton



43.5x32x23.5cm,8.5kg/carton

Precautions for use

1. To protect the LED light strip,do not hit the light-emitting area with hard things.
- 2.After unpacking, please use in 24H to avoid the oxidation effect of solder joints.
3. Avoid direct contact with high temperature objects in the light-emitting area of the lamp, and the instantaneous contact temperature of the surface of the light-emitting area should be less than 210 °C.
4. The soldering iron temperature should be less than 300 during soldering, and the soldering time of single solder should becontrolled within 3s.
5. It is strictly forbidden to twist the lamp with short distance.The single lamp strip (0.5 m) has a maximum twist angle of 720°.
6. The bend diameter at any position needs to be greater than 1cm.