


COB LED Strip Specification

CZ-24-10-304-16-WALL-XX



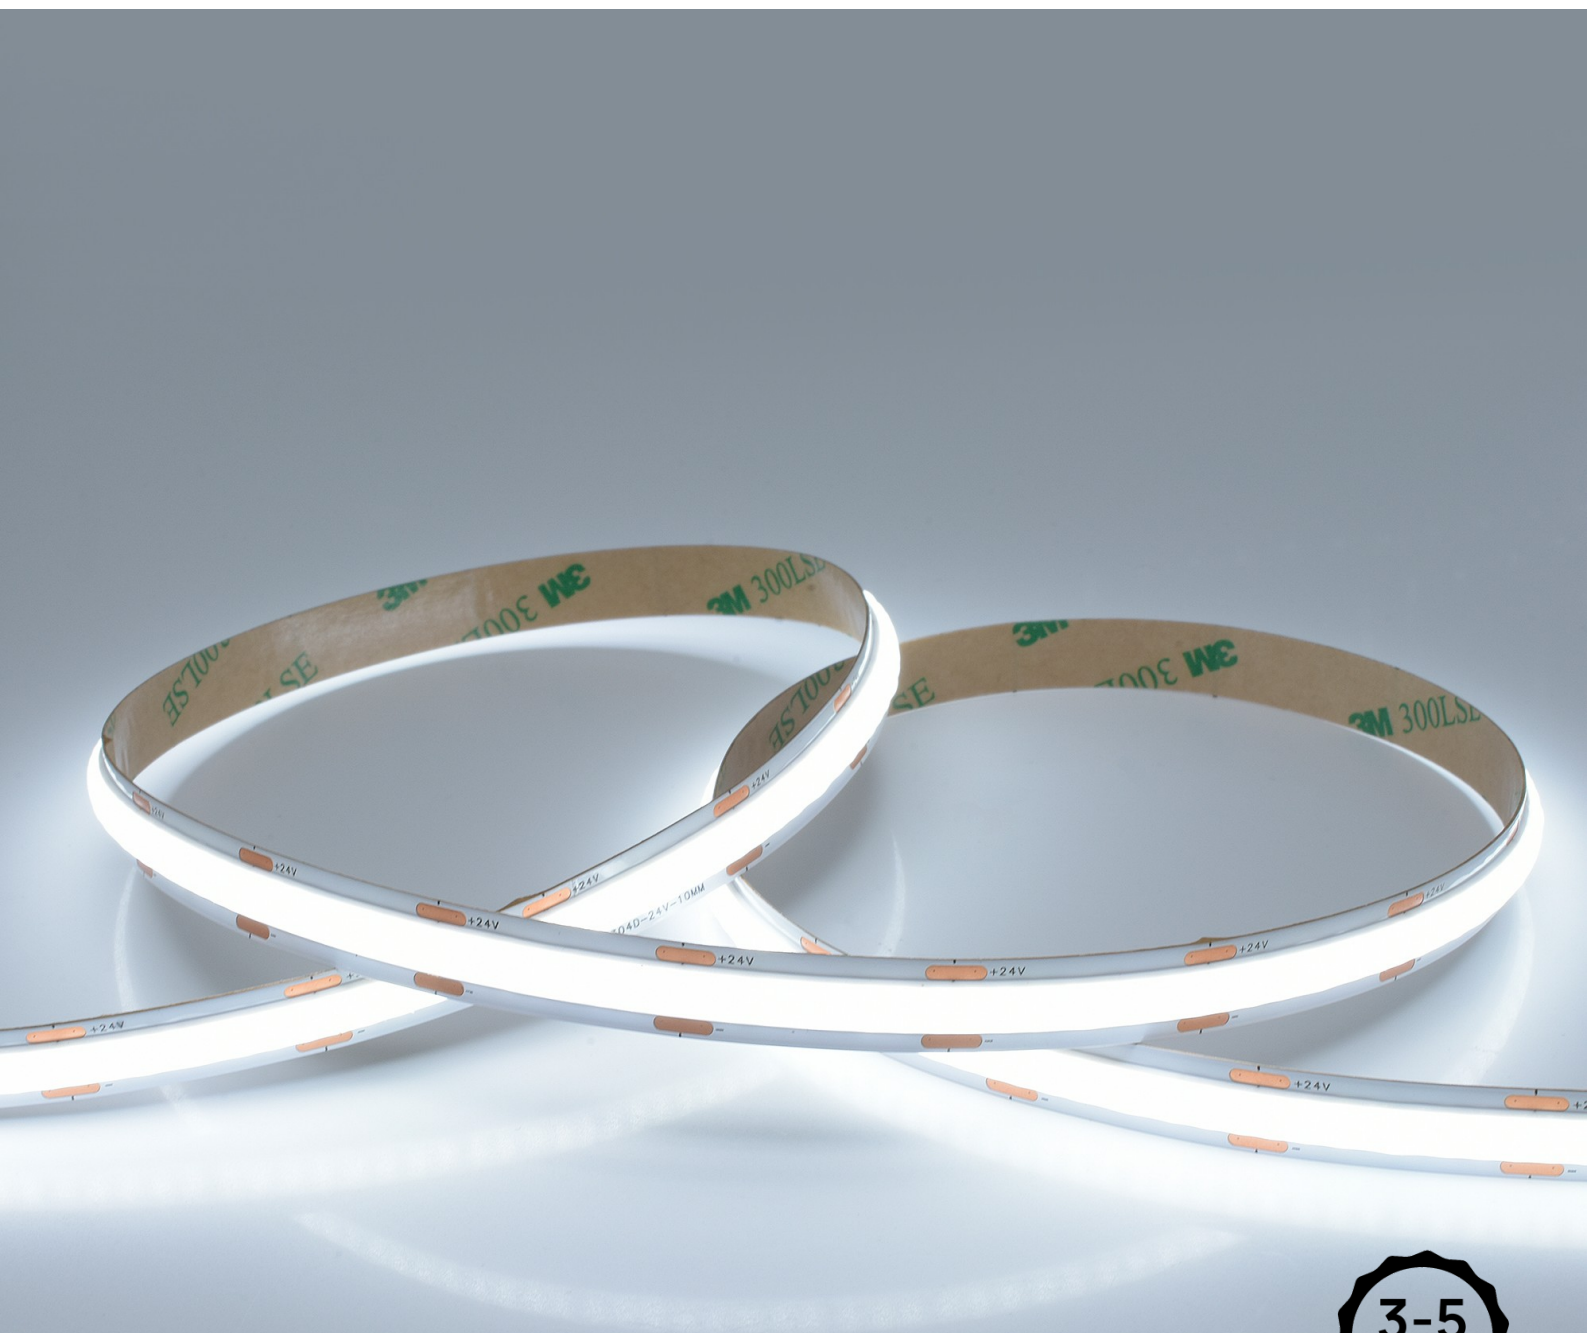

CZ-24-10-304-16-WALL-XX



Description


This product is a high-density DC24V COB flexible light strip with 304 emitting chips per meter. It adopts an on-board integrated packaging process, ensuring uniform light distribution without dark areas and providing soft illumination. With low-voltage power supply for safe and reliable operation, the flexible substrate allows bending and cutting, offering strong adaptability in design. It is widely used in residential, commercial, and outdoor landscape lighting applications.



RoHS



Dimensions & Waterproof

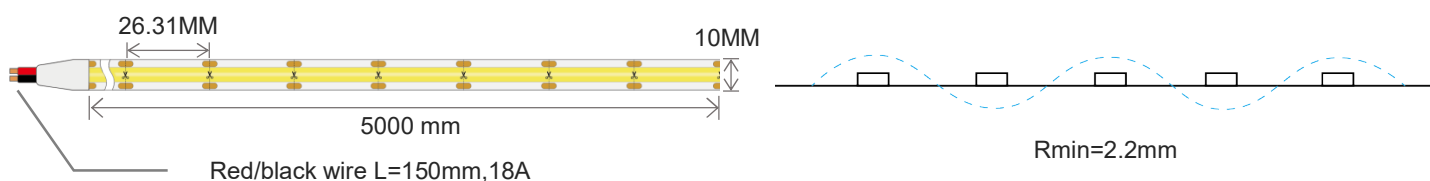

Product Specification

Dimension	5000*8*2.2 MM
Chip Type	Sanan
Chips/m	304
lumens	2224-2384 Lm
Step Length	26.31MM
Color Rendering Index	≥90

Voltage(V)	DC 24 V
Power(W/m)	16 W/M
PCB Width	10 MM
Beam Angle	160°
Operation Temperature	-20°C~+ 45°C
Color Temperature	2700K/3000K/4000K/6000K


Product Photometrics (Data base on IP20 CRI≥90)

Part Number	CCT (K)	Power(16w/m)	
		Lumen (lm/m)	Efficacy (lm/w)
▶ 304D-COBW27-24V-10MM	2700K ±150K	2064-2224	129-139
▶ 304D-COBW30-24V-10MM	3000K ±150K	2064-2224	129-139
▶ 304D-COBW40-24V-10MM	4000K ±200K	2224-2384	139-149
▶ 304D-COBW60-24V-10MM	6000K ±250K	2064-2224	129-139



Light Distribution Curve[Data base on 1m 16W IP20 6500K CRI>90, Unit:cd]


Spectrum Test Report

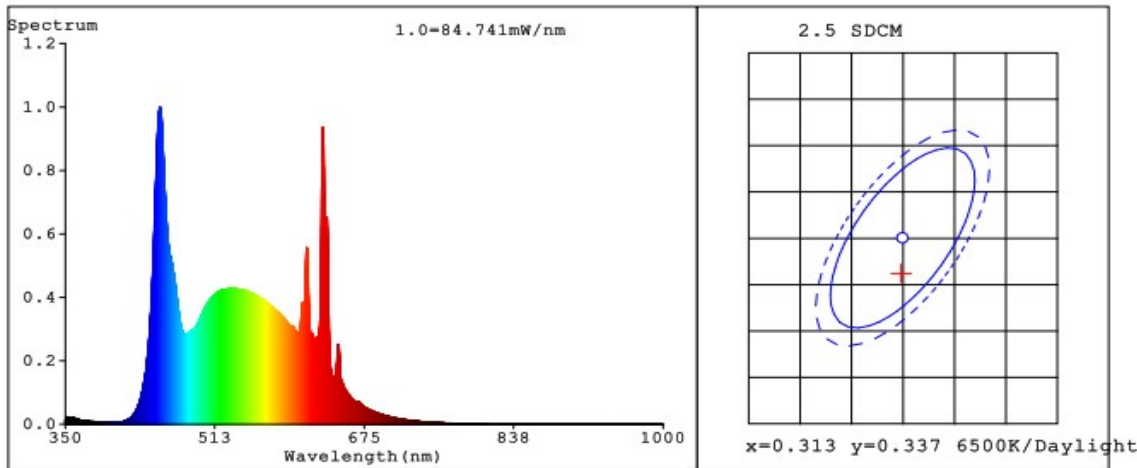


Color Parameters:

Chromaticity Coordinate: $x=0.3129$ $y=0.3332$ $u'=0.1964$ $v'=0.4706$
 CCT=6466K (Duv=0.0052) Dominant WL:Ld =491.6nm WL:Lc = --nm Purity=6.9%
 Ratio:R=15.44% G=78.00% B=6.55% Peak WL:Lp=452.6nm FWHM=21.3nm
 Render Index:Ra=94.4 AvgR=91.5


Packing Information(Data base on IP20)




5meters/reel



5meters/reel



100bags/carton



43.5x32x23.5cm,8.5kg/carton

Precautions for use

1. To protect the LED light strip, do not hit the light-emitting area with hard things.
2. After unpacking, please use in 24H to avoid the oxidation effect of solder joints.
3. Avoid direct contact with high temperature objects in the light-emitting area of the lamp, and the instantaneous contact temperature of the surface of the light-emitting area should be less than 210 °C.
4. The soldering iron temperature should be less than 300 during soldering, and the soldering time of single solder should be controlled within 3s.
5. It is strictly forbidden to twist the lamp with short distance. The single lamp strip (0.5 m) has a maximum twist angle of 720°.
6. The bend diameter at any position needs to be greater than 1cm.